


MODEL F605 - F635

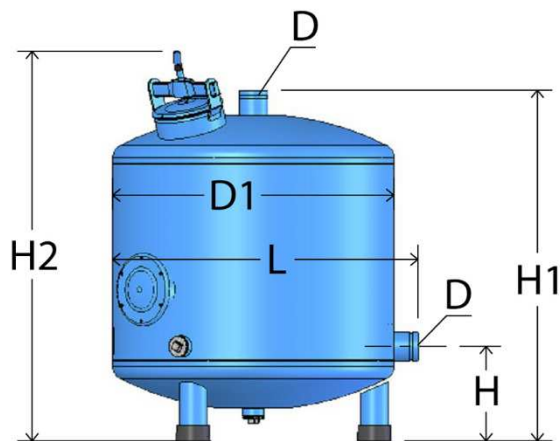

MODEL F640 - F660

Model	Připojení øD [inch]	øD1 [inch]	Doporučený průtok [m ³ /h]	Doporučený pracíprůtok [m ³ /h]	Filtrační plocha [cm ²]	H [mm]	H1 [mm]	H2 [mm]	L [mm]	Hmotnost [kg]
F605	1	12	3.5 - 5.0	6	700	150	785	1 160	445	45
F610	1½	16	5.3 - 9.0	10	1 200	180	570	1 175	457	48
F620	2	20	8.0 - 13.5	17	2 000	180	880	1 280	548	60
F630	3	20	8.0 - 13.5	17	2 000	180	880	1 280	617	60
F635	2	24	13.5 - 20.0	25	2 900	180	880	1 285	696	85
F640	3	30	20.0 - 30.0	38	4 400	300	1 070	1 197	864	130
F650	3	36	32.0 - 44.0	55	6 400	300	1 110	1 242	1 010	170
F660	4	48	55.0 - 79.0	96	11 300	330	1 110	1 189	1 338	246

* | Minimální a maximální průtok je pouze doporučený

** | Doporučená filtrační rychlost: 20 - 50m/h